



WORKSHOP 2 Quality Control in Wood Construction

Item Type	event;event
Authors	Kraler, Anton
Download date	2024-07-16 16:33:26
Link to Item	https://hdl.handle.net/20.500.14394/50568

University of Innsbruck / Timber Engineering Unit holzbaulehrstuhl
Universität Innsbruck

Quality Control in Wood Construction

Asst.-Prof. DI Dr. techn. Anton Kraller



Workshop 2 – 2011 Wood Structures Symposium

What is quality?

Quality is defined as:
 “Degree to which a set of inherent characteristics fulfills requirements”
 -ISO 9001:2008-

Quality management
 ... the whole of features and characteristics of a product regarding its ability to meet the quality requirements.
 EN ISO 9000

Rules for the organization, implementation and monitoring of measures

Quality Control in Wood Construction - Anton Kraller 2

Regulations and quality marks



Quality Control in Wood Construction - Anton Kraller 3

Why quality control?



Quality Control in Wood Construction - Anton Kraller 4

Why quality control?



Quality Control in Wood Construction - Anton Kraller 5

Quality requirements

What customers want:

- Customer focus and customer service
- Compliance with the contractual agreed quality

What companies want:

- Profitable construction project
- Compliance with the contractual agreed quality

Quality Control in Wood Construction - Anton Kraller 6


Quality management - works!



stave church - 900 years

farm - 500 years

Quality requirements - present

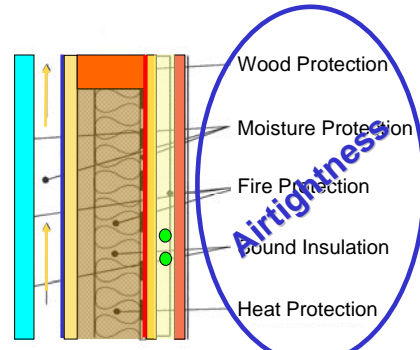

Materials for timber constructions




Support by certified constructions

dataholz.com

Bauteile - Trenndecke - tdmnx02a

Stärke Bauteil	h	ρ	λ	α	μ	μ _{eff}	μ _{eff} / μ	μ _{eff} / μ ₀	μ _{eff} / μ ₀ (max)
A	50,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000
B	20,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000
C	50,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000
D	50,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000
E	50,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000
F	50,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000
G	50,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000
H	50,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000
I	50,0	500	0,13	1,0	0,000	0,000	1,000	1,000	1,000

Quality criteria for the construction process

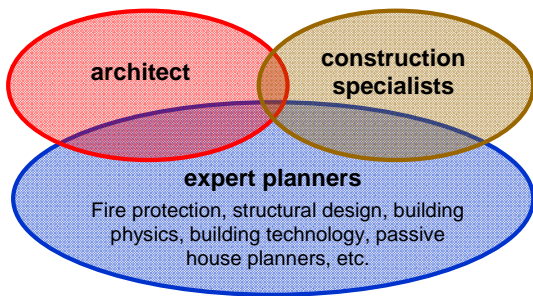

Requirements for high quality products

- **Quality Awareness**
 - The company management must want quality
- **Quality Production**
 - Specialization, prefabrication
- **Quality Products**
 - Clear definition, e.g. wall elements with quality certification labels
- **Quality Control**
 - Internal and external controlling (external monitoring)
- **Quality Management**
 - Procedures: Organization and implementation of measures

Quality Control

Quality Monitoring during Production and Construction

Quality Control in Wood Construction - Anton Kraler

13

Quality Control

Quality Monitoring during production and construction

Quality Control in Wood Construction - Anton Kraler

14

Quality Control

Quality Monitoring during Production and Construction

Quality Control in Wood Construction - Anton Kraler

15

Quality Control

Damage caused by leakages

Quality Control in Wood Construction - Anton Kraler

16

Quality Control

Damage caused by leakages

Quality Control in Wood Construction - Anton Kraler



17

Quality Control

Damage caused by leakages

Quality Control in Wood Construction - Anton Kraler

18

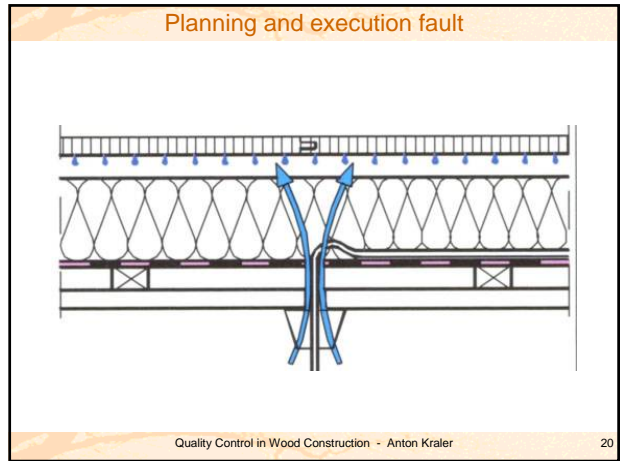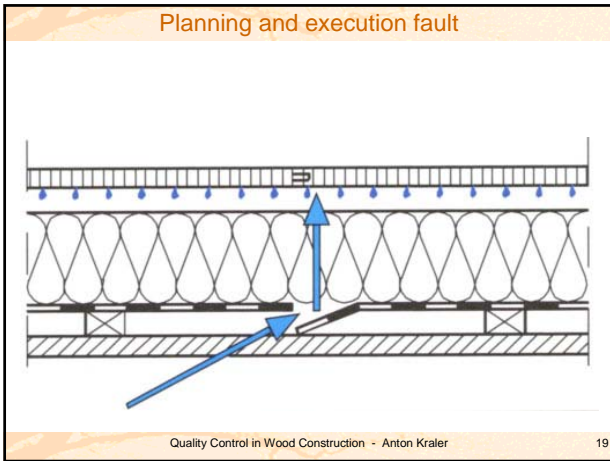

Why quality control? Why airtightness?

Problem: A gap with airflow from humid side

outside: 0°C, 80% r. F.


inside: 20°C, 50% r. F.

360g water/day/m

1 mm gap in construction

For comparison: with vapor diffusion, only 1g water/day/m²

Quality Control in Wood Construction - Anton Kraller 21

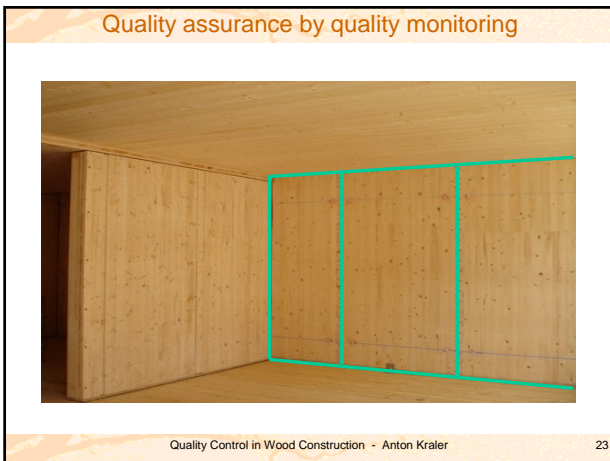

Quality control – airtightness

Measuring System

- Door frame with a membrane
- Measuring Instrument (data capture and evaluation)
- Fan

Aids and Appliances

Fog generator Flow meter

Quality Control in Wood Construction - Anton Kraller 24

Quality control – timber

Moisture measuring device

Ultrasonic testing equipment

Drill resistance measuring device

Fractometer tests

Bending test

Hardwood core drill

Quality Control in Wood Construction - Anton Kraller 25

Quality control – thermal insulation

without thermal insulation

with thermal insulation

Quality Control in Wood Construction - Anton Kraller 26

Why quality control? Why airtightness?

Heat loss through leakage

4.8 times more heat is lost across the gap than over the entire surface of 1m² of insulation.

14 cm

1 m

1 mm

Example:
 U-Value (calculated) = 0.30 W/m²K
 U-Value with the gap (0.30 W/m²K x 4.8) = **1,44 W/m²K**

outside: 0°C, 80% r. F.; inside: 20°C, 50% r. F.;

Quality Control in Wood Construction - Anton Kraller 27

Thermal building envelope

Quality Control in Wood Construction - Anton Kraller 28

Infrared thermography

Thermography camera

VARIOSCAN

Quality Control in Wood Construction - Anton Kraller 29




Quality control: blower door - thermography

Example: Installation (wiring)

Quality Control in Wood Construction - Anton Kraller 30

Quality control: blower door - thermography


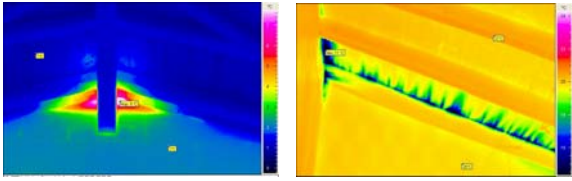

Example: roof connection

Quality Control in Wood Construction - Anton Kraller 31

Quality control: blower door - thermography


Example: faultless execution

Quality Control in Wood Construction - Anton Kraller 32

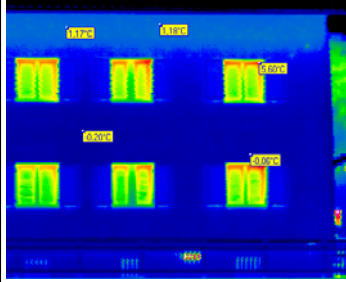Quality control: heating, water, ventilation



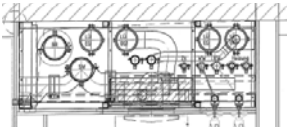

Quality Control in Wood Construction - Anton Kraller 33

University of Innsbruck / Timber Engineering Unit **holzbaulehrstuhl**
 Universität Innsbruck



Quality Control

Thank you for your attention

Quality Control in Wood Construction - Anton Kraller 34